

# HELULIGHT® WORKPLACE 1200



Art. Nr. 11024103

ID 1-000000-07063

EAN Nr. 4260654164756



## Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 12464-1

DIN EN 62471:2009




## Elektrische Rahmenbedingungen / Electrical characteristic

|                               |                 |
|-------------------------------|-----------------|
| Netzanschluss / Main Supply   | 230 VAC         |
| Leistung / Power              | 50,4 W          |
| Dimmbar / Dimmable            | stepless        |
| Anschluss / Connection Type   | GST18, 3-Pol, - |
| Durchschleifbar / Loopthrough | Ja / Yes        |
| Pinbelegung / Pin assignment  |                 |



## Licht / Light

|                                       |              |
|---------------------------------------|--------------|
| Bestückt / Fitted With                | LED          |
| Lichtfarbe / Light Colour             | 5700 K       |
| Lichstrom(Brutto) / Lum. Flux(Gross)  | 0 lm         |
| Lichstrom(Netto) / Lum. Flux(Net)     | 6847 lm      |
| Effizienz(Brutto) / Efficiency(Gross) | 0 lm/W       |
| Effizienz(Netto) / Efficiency(Net)    | 138 lm/W     |
| Abstrahlwinkel / Beam Angle           | 100°         |
| Farbtreue / Colour Rendering          | RA / CRI >80 |
| Photobiological Safety                | RG-1         |

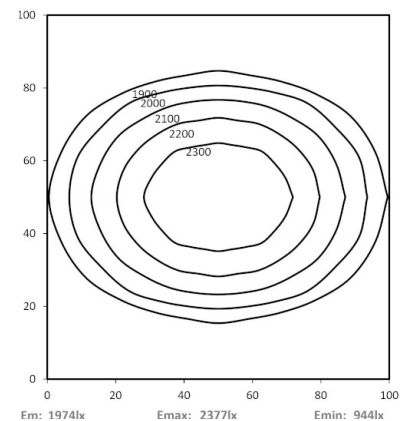

## Mechanik / Mechanics

|                                      |               |
|--------------------------------------|---------------|
| Gehäuse / Housing                    | Aluminium     |
| Abdeckung / Cover                    | PMMA, Prism   |
| Drehbar / Rotatable                  | Nein / No     |
| Gewicht(Netto) / Weight(Net)         | 4,32 kg       |
| Betriebstemperatur / Operating Temp. | -20°C / +40°C |
| Lebensdauer / Lifetime               | min. 60000 h  |
| Befestigung / Fastening              | -             |

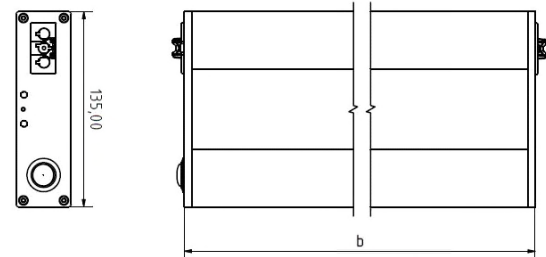

b= 1216mm

\*Technische Änderungen vorbehalten | technical modifications reserved